

INDOOR TECHNICAL LIGHTING


CATALOGUE
AUGUST 2025



CREST
SERIES



I L L U M I N A T I O N

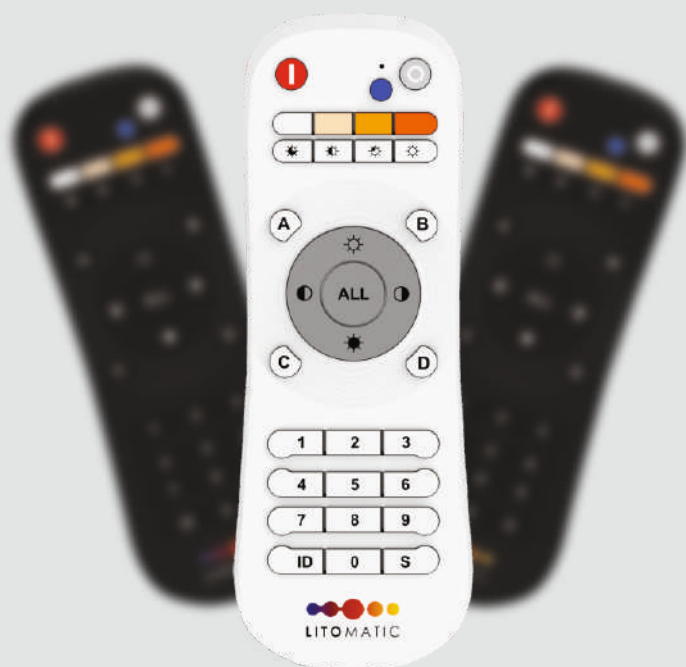



T H A T I N S P I R E S



INDEX

06-08	About Litomatic
09	About Crest Series
10	Litomatic's Presence
11-13	Downlight
14	Adjustable Downlight
15	Slim Downlight
16	Surface Downlight
17-35	Spotlight
36-37	Minimal Spotlight
38	Low Depth Adjustable Spotlight
39	360° Adjustable Spotlight
40	Gypsum Frames
41	MR-16 Module
42-43	Wallwasher
44	Surface Spotlight

INDEX

45	360° Adjustable Spotlight
46	Spotlight
47-49	Tracklight & Track Channel
50-51	Laserblade
52-55	Mini Spotlight
56	Mini Footlight
57	Beat (Strip Light)
58	Beat (Strip Light CCT)
59	Wallgrazer
60	Sky Line
61	Silicon Flex
62-63	Beat SMPS
64	Sensor & Button Remote
65	Remote & Gateway & Touch Panel
66	Our Clients



About Litomatic

Established in 1992 as Kardhar Electric Co., Litomatic has grown into a leading name in the lighting industry. With Raj Kothari joining in 2011 and supported by Ashish Kothari's expertise. Formally founded in 2016, Litomatic swiftly pioneered remote-controlled tunable and dimmable lighting in India, ensuring superior products through extensive testing in Udaipur. Litomatic also boasts a well-equipped in-house lab that supports its manufacturing processes, enhancing reliability and delivering complete lighting solutions without needing external consultants or service providers. Participation in key exhibitions from 2017 to 2019 bolstered its reputation, leading to a state-of-the-art manufacturing facility.

Guided by in-house R&D, Litomatic's advanced LED and COB technology ensures precision and efficiency. The brand's commitment to the 'Make in India' initiative and over 550+ dies and molds reflect its dedication to innovation and quality. With a network of over 300+ partners across 110+ cities, Litomatic continues to revolutionise spaces with exceptional lighting solutions. Litomatic stands as a beacon of excellence, poised to illuminate the future.

FEATURES



CERTIFIED

IS- 15885
(Part 2/Sec 13) : 2012



R - 84003603
www.bis.gov.in

IS- 10322
(Part 5/Sec 1) : 2012



R - 84004740
www.bis.gov.in

IS- 10322
(Part 5/Sec 2) : 2012



R - 84004669
www.bis.gov.in

IS- 10322
(Part 5/Sec 7) : 2017



R - 84004685
www.bis.gov.in





LITOMATIC R&D

Lighting Innovations - Product Development & Design

LITOMATIC's expertise shines in luminaire engineering, blending aesthetics and functionality for unrivalled brilliance. Our meticulous approach encompasses the precise selection of light sources, materials with optimal heat sink capacity, and cutting-edge technologies. With a keen focus on achieving the highest standard of lighting emission, each functional prototype serves as a catalyst for refining elements and orchestrating a seamless creative progression. Experience the alchemy of innovation as we illuminate the path to luminaire excellence.

Factory Innovations - Crafting Excellence

At Litomatic, we are dedicated to delivering products that embody contemporary design through exceptional craftsmanship. Our cautious material selection, accurate finishing, and continuous research and development ensure durable and reliable products that elevate the global market. Each creation harmoniously fuses structure, light, and architecture, challenging artistic boundaries.

Machining Center - Precision Meets Artistry

Our cutting-edge machining centers enable us to achieve uncompromising quality, from grinding to precise processing. These high-precision machines play an indispensable role in crafting our finest products.

Exquisite Workmanship - Quality and Beauty

Litomatic lamps are renowned for their superior quality and meticulous manufacturing. From mold manufacturing to die casting, we passionately uphold the highest standards of craftsmanship.

Seamless Assembly - Precision and Safety

Our skilled staff follows strict procedures on electrical and mechanical assembly lines, guaranteeing compliance with regulations. We prioritize electrical safety checks, ensuring the utmost reliability of our luminaires.

Packing and Delivery - Global Excellence

Every Litomatic product undergoes painstaking preparation and packaging, ready to be shipped worldwide. As a trusted brand, Litomatic delivers excellence to customers across numerous countries and regions.





CRI Technology for Color Accuracy

Color accuracy is crucial in lighting, and the Color Rendering Index (CRI) helps assess how faithfully a light source reveals colors compared to natural light. LED lighting, with its different color temperatures and light variations, directly affects color accuracy. Opting for higher CRI-rated LEDs ensures more accurate color representation. Experience vibrant and true-to-life colors with Litomatic's advanced CRI technology.

Glare-Free LED Lighting

At Litomatic, we prioritize the ultimate lighting experience with our precision-engineered anti-glare technology. Through meticulous control and innovative design, we ensure secondary optical refraction curves and superior electroplate treatment, resulting in flicker-free, high-performance lighting even in low-light conditions. With a generous beam angle of up to 40°, our luminaires create a serene and comfortable lighting atmosphere, allowing you to enjoy the illumination without any distracting glare.

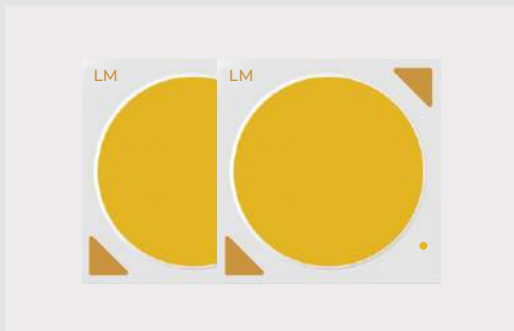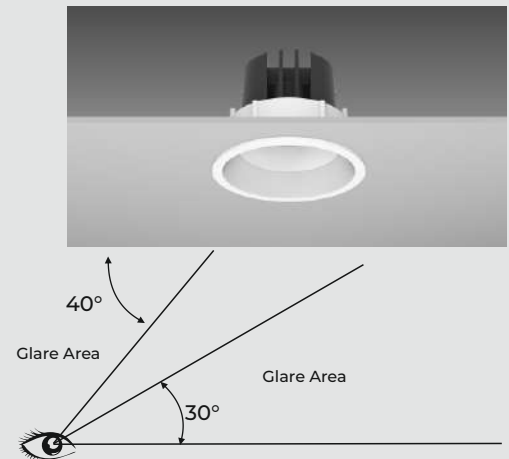

LED Chips Illuminating Innovation

LED chips, the heart of modern lighting, revolutionize illumination with advanced technology. These compact semiconductor devices drive efficiency, superior color rendering, and remarkable longevity. Powering smart light bulbs and energy-saving solutions, LED chips redefine lighting experiences. Illuminate your space with efficiency and brilliance using Litomatic's high-quality LED chips.

Brilliant COB Lighting

Experience flawless lighting with Litomatic's cutting-edge Chip-On-Board (COB) technology. Our COB fixtures deliver even, natural light without double images, creating a clean and dimensionally rich lighting experience. Say goodbye to blurry edges and embrace Litomatic's superior COB lighting for captivating illumination.



ABOUT CREST SERIES



CREST
SERIES

5 Year
Warranty*

Design-Forward Lighting for Vibrant Spaces


Litomatic's Crest Lighting Series—a refined selection crafted to redefine commercial environments with exceptional elegance and innovation. This series transcends conventional design standards, offering a sophisticated aesthetic that enhances architectural vision. Equipped with premium drivers, each fixture in the Crest Series offers superior energy efficiency, flicker free illumination, and an extended lifespan, ensuring consistent performance and reliability. These products also feature glare-reduction technology, enhancing visual comfort and usability. The Crest Series seamlessly integrates form and function, elevating the ambience of any space while supporting sustainability and durability.




1st
PIONEER
with this CONCEPT
SINCE 2016



RF 2.4G⁺ + BLE

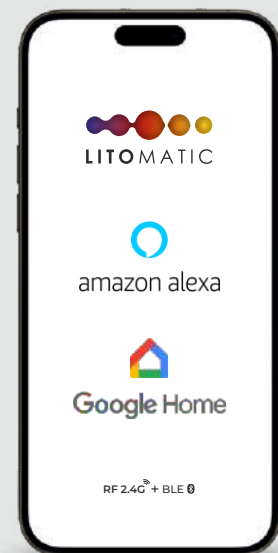

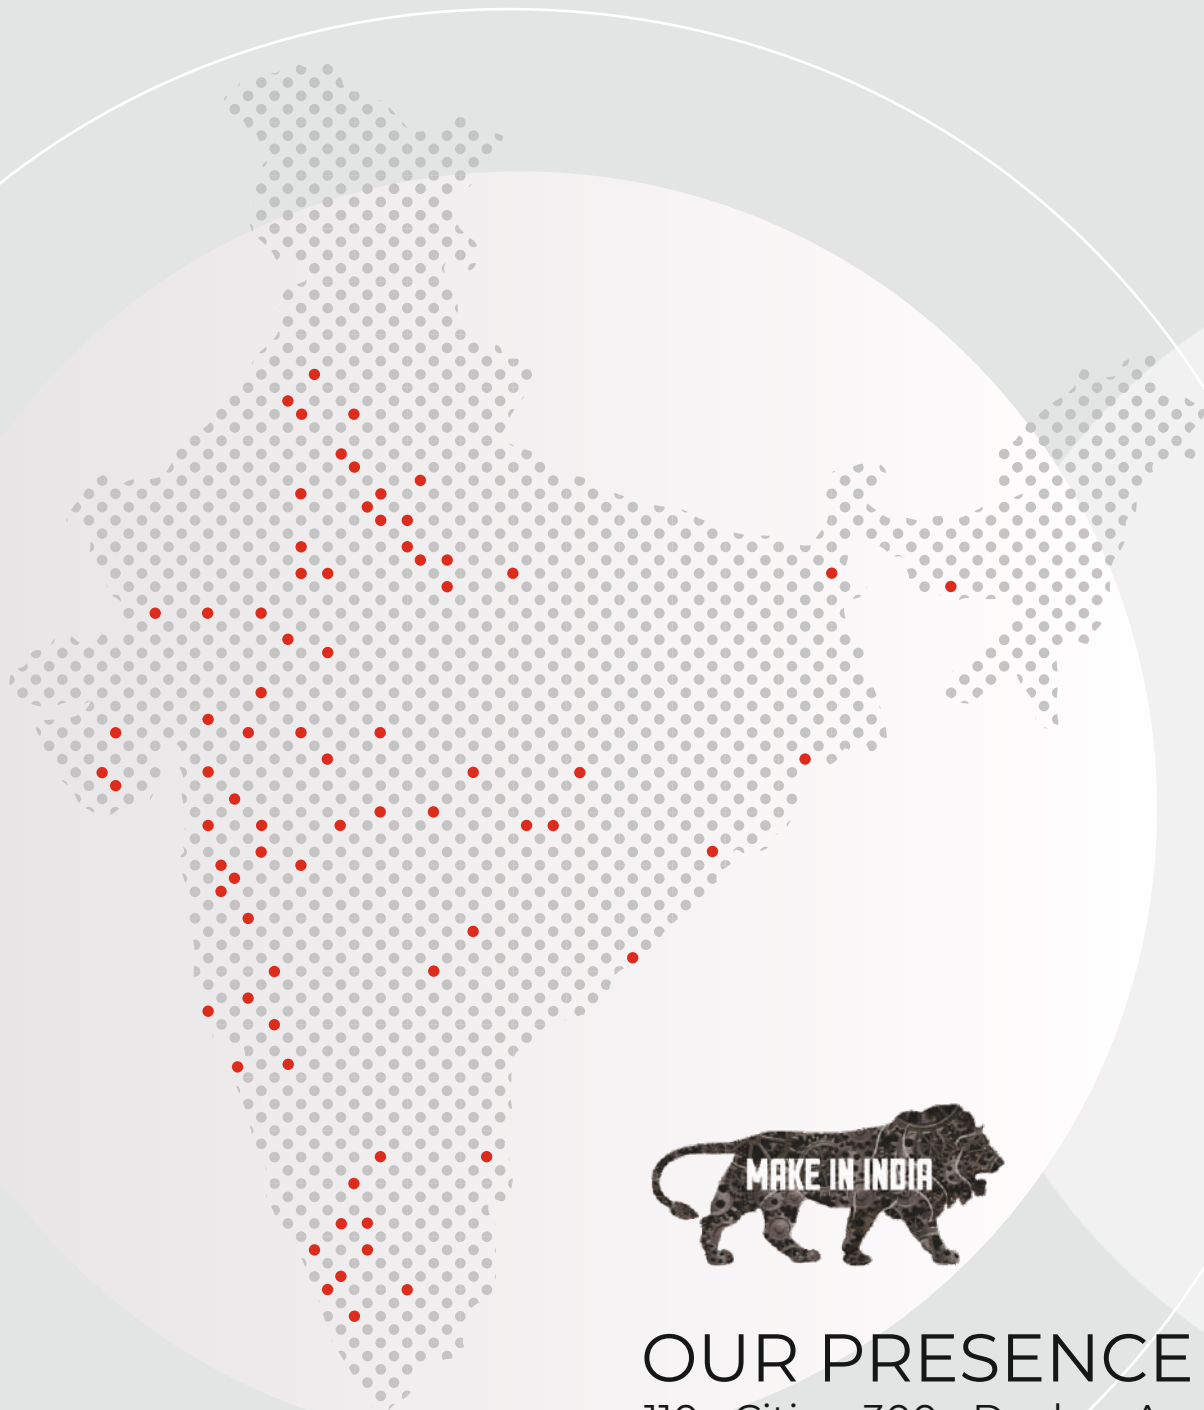


OUR PRESENCE

110+ Cities 300+ Dealers Across India

Agra, Ahmedabad, Ajmer, Akola, Ambikapur, Amravati, Amritsar, Anand, Aurangabad, Balgaum, Banswara, Bareilly, Barmer, Barnala, Begur, Begusarai, Bengaluru, Bharuch, Bhatinda, Bhavnagar, Bhilai, Bhilwara, Bhopal, Bhubaneswar, Bikaner, Bilaspur, Chandigarh, Chennai, Cochin, Coimbatore, Dehradun, Dhule, Durg, Ernakulam, Faridabad, Fatehabad, Firozabad, Gandhidham, Ghaziabad, Goa, Gorakhpur, Gurgaon, Guwahati, Hanumangarh, Hazaribagh, Hisar, Hubballi, Hyderabad, Indore, Jabalpur, Jaipur, Jalgaon, Jamnagar, Jind, Jodhpur, Jalandhar, Kannur, Karnal, Khanna, Kishangarh, Kolhapur, Kolkata, Kota, Kozhikode, Kutch, Lucknow, Ludhiana, Madurai, Malur, Manguluru, Mathura, Meerut, Moga, Morbi, Mumbai, Mysore, Nabha, Nagpur, Nanded, Nashik, Navi Mumbai, New Delhi, Noida, Panipat, Patiala, Patna, Prayagraj, Pune, Raipur, Rajkot, Rajsamand, Ranchi, Ratlam, Salem, Satara, Secunderabad, Sikar, Siliguri, Siwan, Solapur, Surat, Talegaon, Thane, Thrissur, Tiruppur, Trichy, Trivandrum, Udaipur, Vadodara, Visakhapatnam.

DIVINE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	120X50mm	155X55mm	175X55mm
Cut Out	:	110mm	145mm	165mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

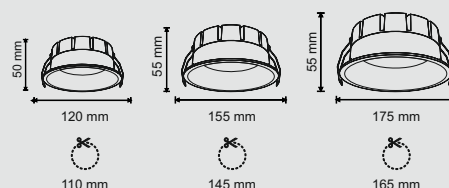

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge




440V
OVP

5
Year
Warranty*

DIVINE

DOWNLIGHT

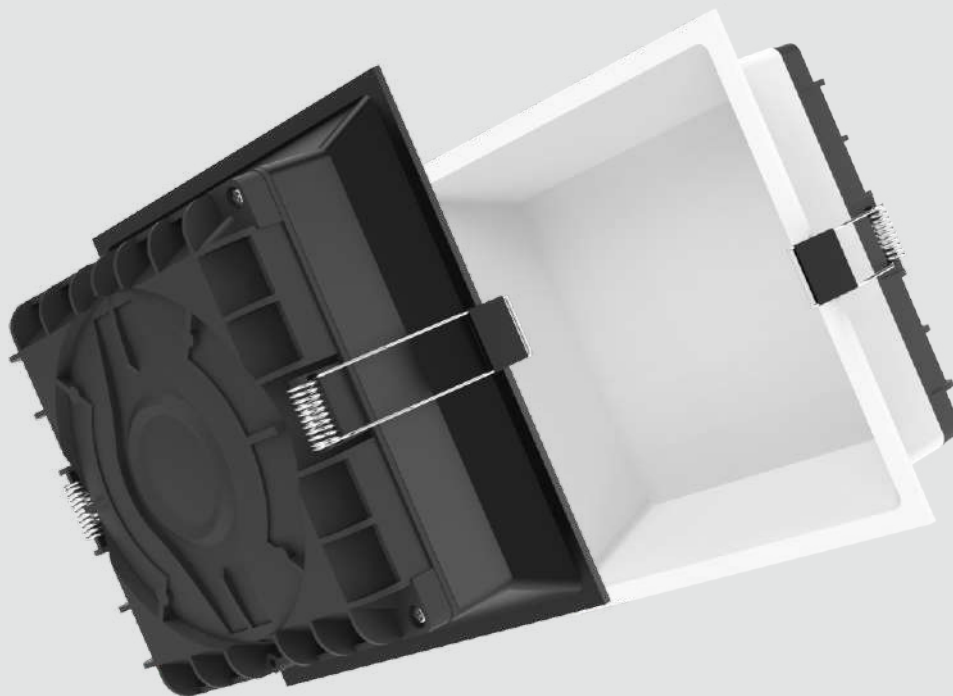

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w
Dimension	:	110x110x50mm	145x145x55mm
Cut Out	:	100X100mm	135X135mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	110°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	

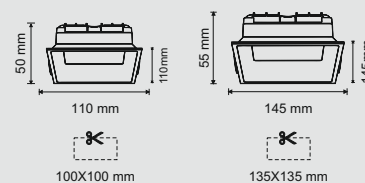

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5
Year
Warranty*

GRACE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	90X56mm	100X56mm	125X56mm
Cut Out	:	85mm	95mm	115mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	100°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

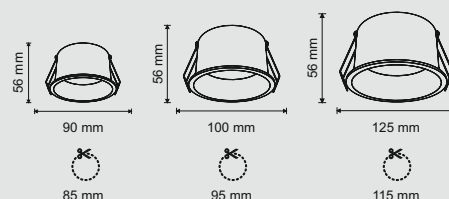

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP

5

Year
Warranty*

FISCO

ADJUSTABLE DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	110X45mm(55mm After Moving)
Cut Out	:	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux

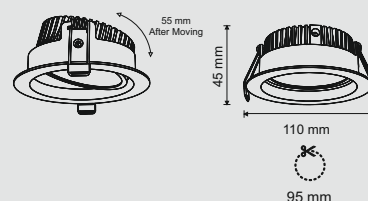

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5
Year
Warranty*

ACCORD

SLIM DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	115X30mm	155X30mm	180X30mm
Cut Out	:	105mm	145mm	170mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

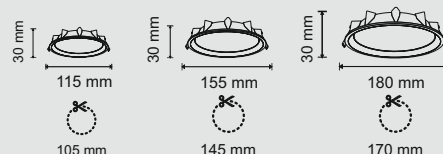

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP

5

Year
Warranty*

IGNITE

SURFACE DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	8w	15w	22w
Dimension	:	90X75mm	110X75mm	125X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge





440V
OVP

5
Year
Warranty*

SPIRIT

ANTIGLARE SPOTLIGHT

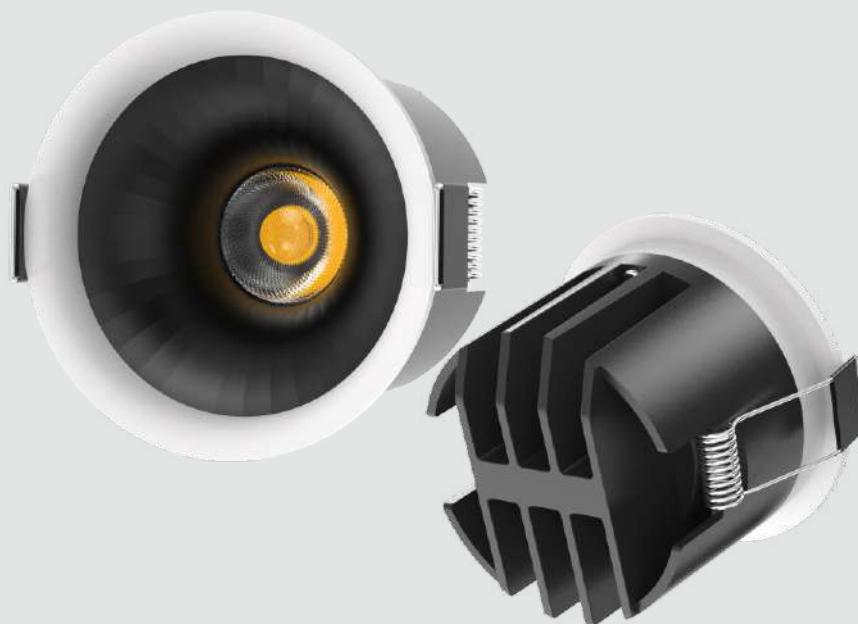

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w
Dimension	:	62X70mm	75X75mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/55°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP





5
Year
Warranty*



Anti Glare

COMFORT

SPOTLIGHT

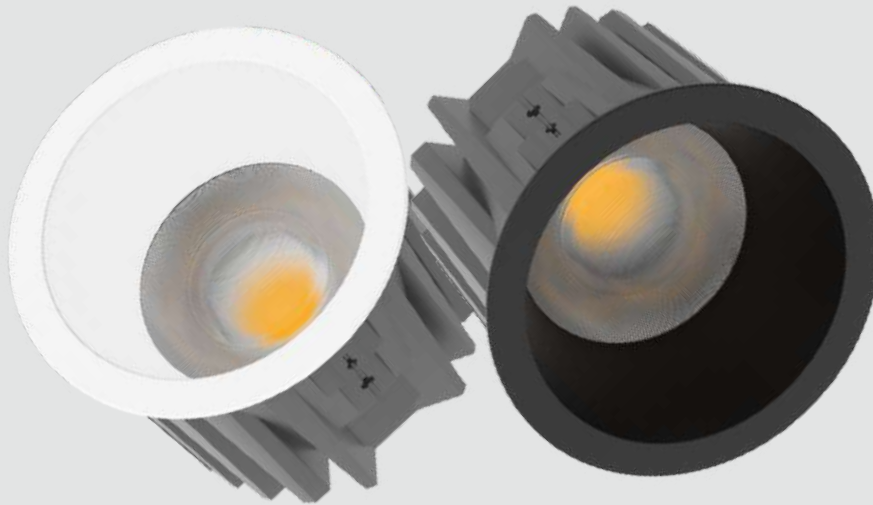

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	15w	20w
Dimension	:	85X66mm	105X70mm
Cut Out	:	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	50°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

JAZZ

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w
Dimension	:	65X80mm	85X88mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



SPOTLIGHT



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5
Year
Warranty*

STUNNER_{STRIPES}

SPOTLIGHT

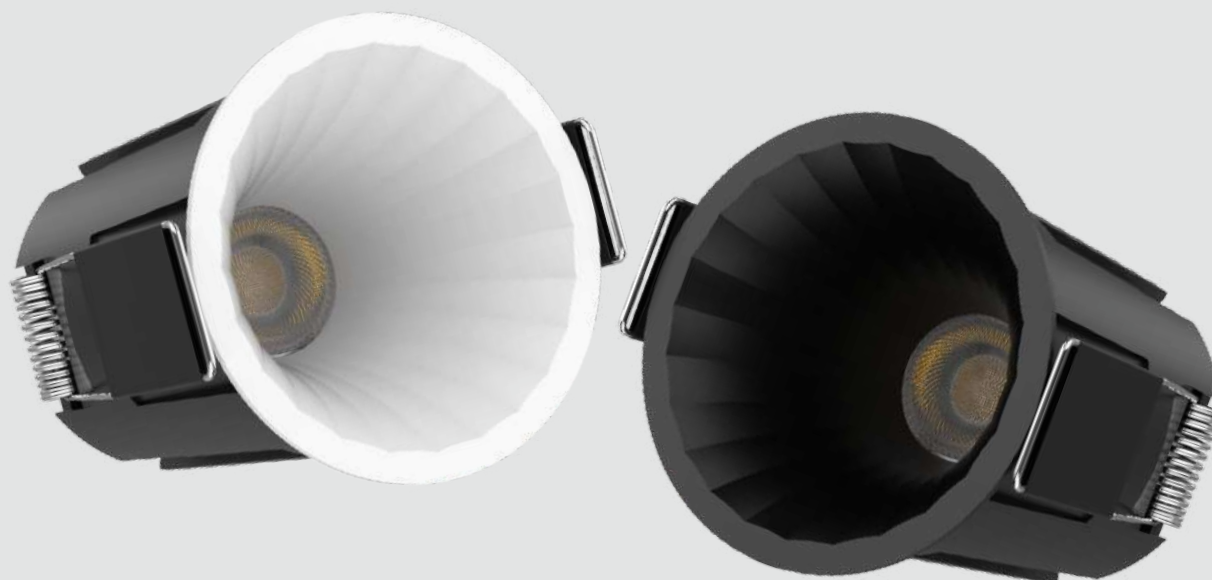

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH


Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w	20-25w
Dimension	:	57X75mm	72X85mm	82X95mm
Cut Out	:	50mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/60°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



75 mm

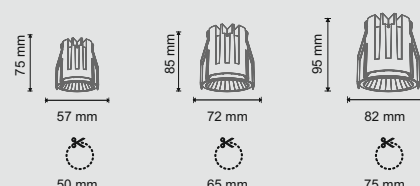

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

STUNNER_{PRISM}

SPOTLIGHT

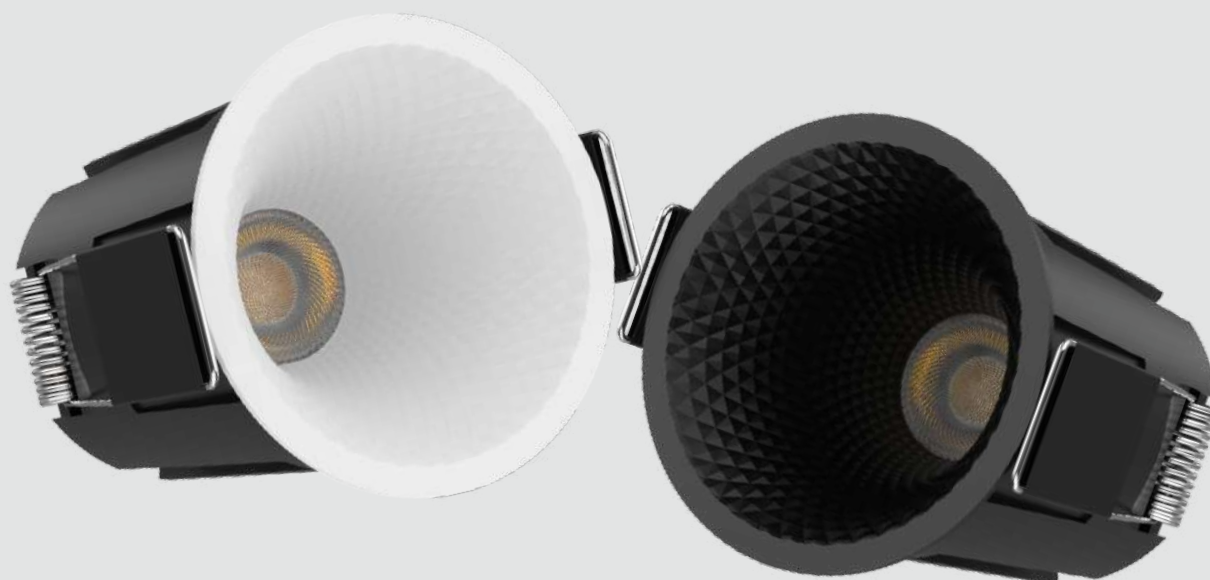

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w	20-25w
Dimension	:	57X75mm	72X85mm	82X95mm
Cut Out	:	50mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/60°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

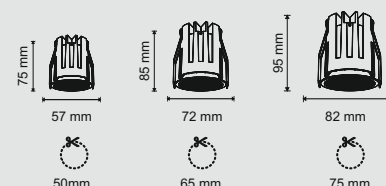

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP



5
Year
Warranty*

CRUISE

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	70X65mm	85X75mm	95X90mm	115X105mm
Cut Out	:	60mm	75mm	85mm	105mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)			
Material	:	Die Cast Aluminium ADC-12			
LED Brand	:	Litomatic/Bridgelux			

65 mm



70 mm

75 mm



85 mm

90 mm




95 mm

105 mm



115 mm

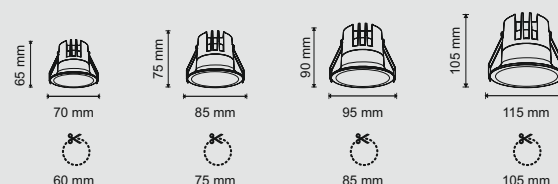

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

DUKE

SPOTLIGHT

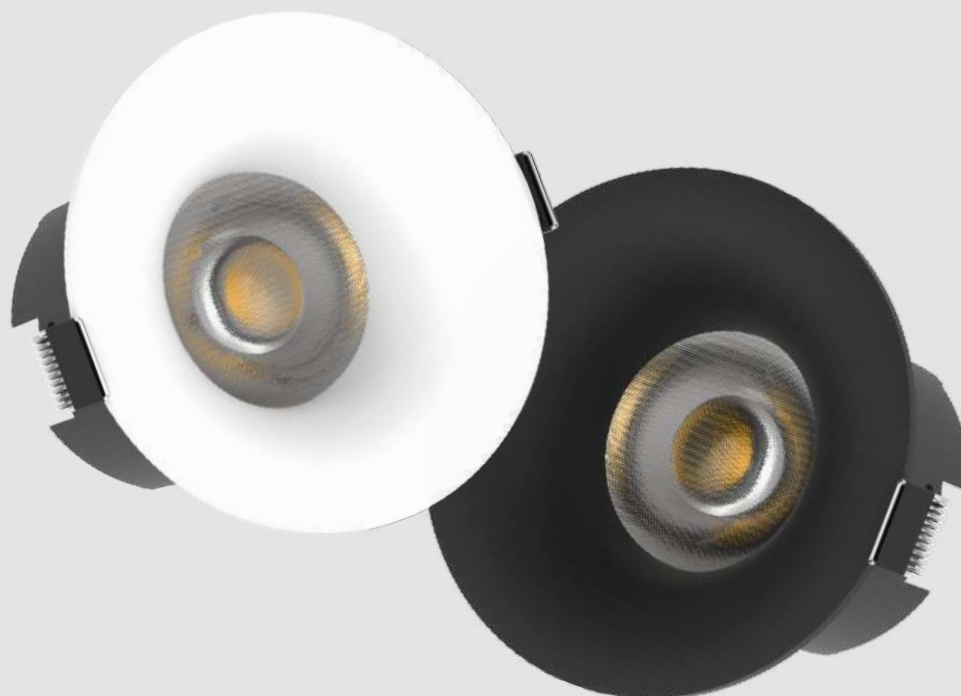

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	70X58mm	85X65mm	98X84mm
Cut Out	:	60mm	75mm	85mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

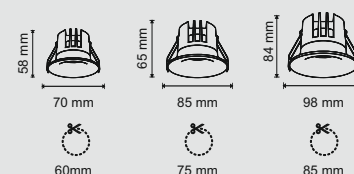

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

EXOTIC

ANTI GLARE SPOTLIGHT



Available In : Gun Metal, Chrome, Rose Gold, Gold, Titanium Black

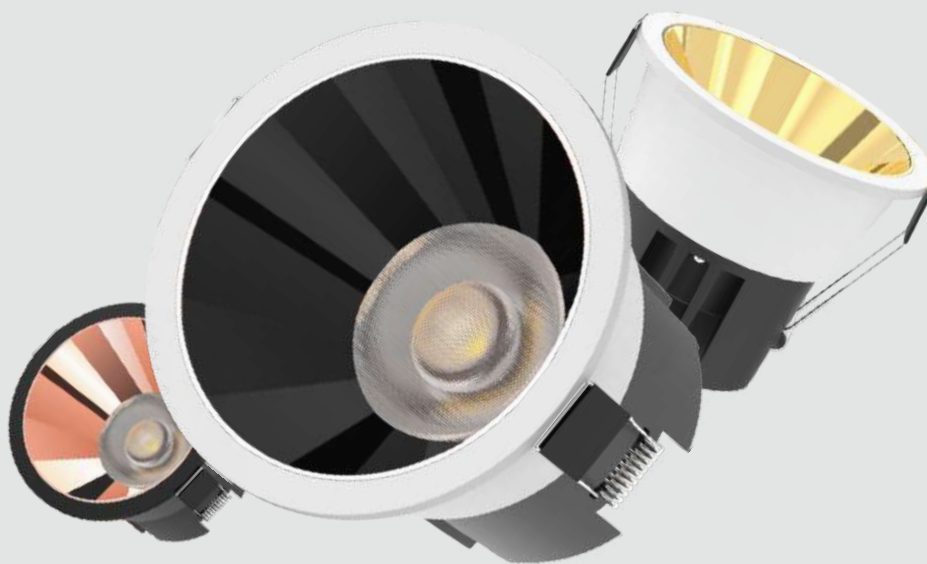

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	75X70mm	85X80mm	100X95mm
Cut Out	:	65mm	75mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

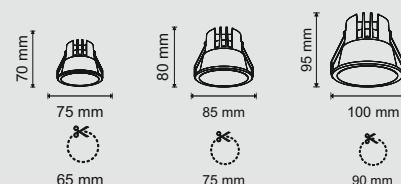

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

CURVE

ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	78X65mm	88X75mm	100X85mm	120X100mm
Cut Out	:	72mm	80mm	93mm	113mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			


Note : 2700/3500/5000k (available on request)

Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
------------	---	--------------	--------------	-----------	-----------

CRI (Ra)	:	80 (90/95 available on request)			
----------	---	---------------------------------	--	--	--

Material	:	Die Cast Aluminium ADC-12			
----------	---	---------------------------	--	--	--

LED Brand	:	Litomatic/Bridgelux			
-----------	---	---------------------	--	--	--

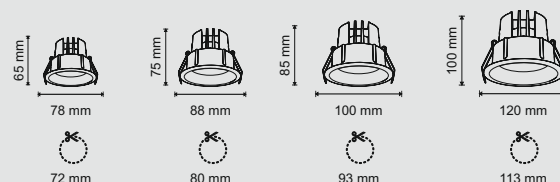

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

BLAST

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	60X48mm	70X50mm	80X65mm	105X77mm
Cut Out	:	52mm	60mm	70mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			


Note : 2700/3500/5000k (available on request)

Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
------------	---	--------------	--------------	-----------	-----------

CRI (Ra)	:	80 (90/95 available on request)			
----------	---	---------------------------------	--	--	--

Material	:	Die Cast Aluminium ADC-12			
----------	---	---------------------------	--	--	--

LED Brand	:	Litomatic/Bridgelux			
-----------	---	---------------------	--	--	--

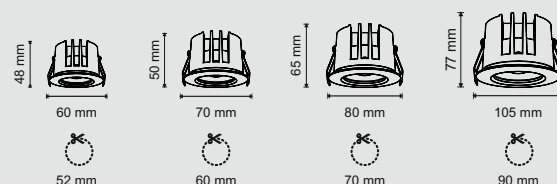

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge




440V
OVP



5
Year
Warranty*

HECTOR

SPOTLIGHT

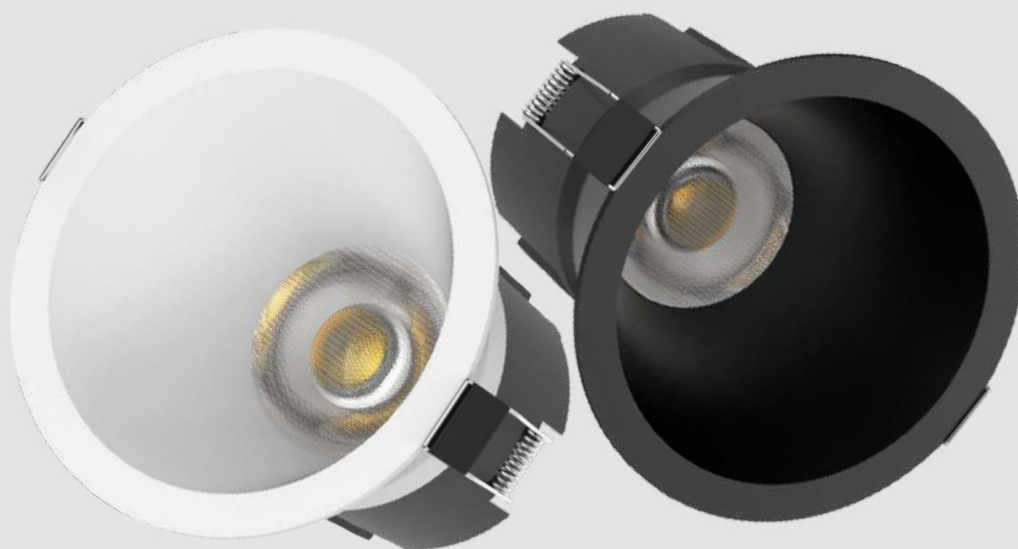

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT



Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w
Dimension	:	72X75mm	90X95mm
Cut Out	:	62mm	80mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

COMPASS

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	60X80mm	70X95mm	85X118mm
Cut Out	:	53mm	62mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		

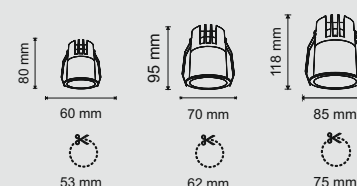

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP

5

Year
Warranty*

TRUMP

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w	2X12-15w
Dimension	:	83X83X83mm	162X83X83mm
Cut Out	:	77X77mm	155X77mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5
Year
Warranty*

PASSION

SPOTLIGHT

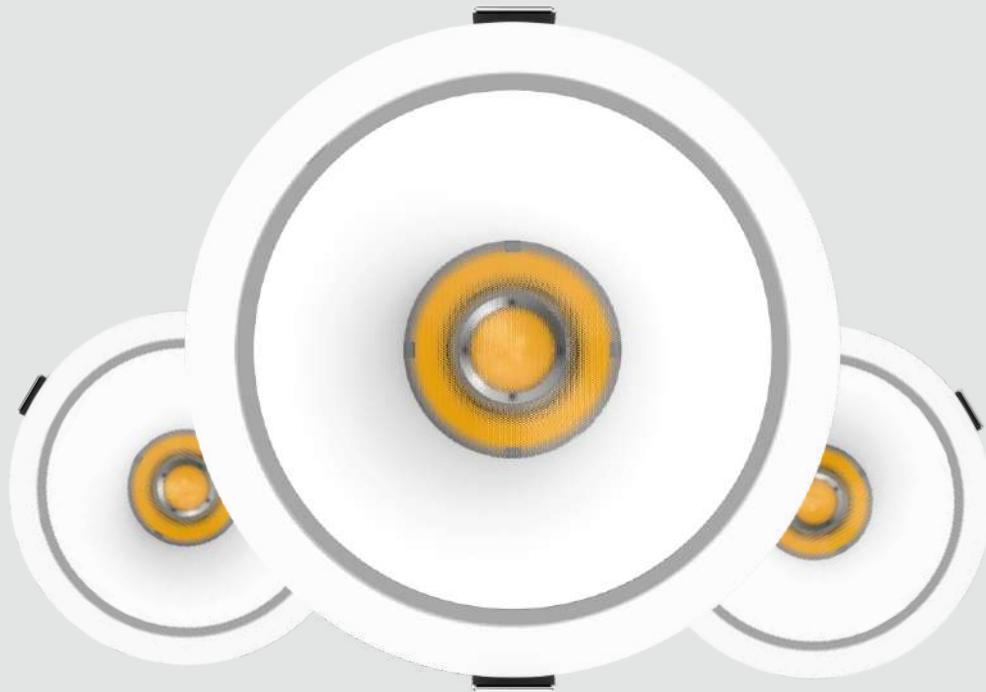

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w
Dimension	:	80X54mm	110X70mm
Cut Out	:	70mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



ARC

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	72X75mm
Cut Out	:	65mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

TWIST

TRIMLESS SPOTLIGHT

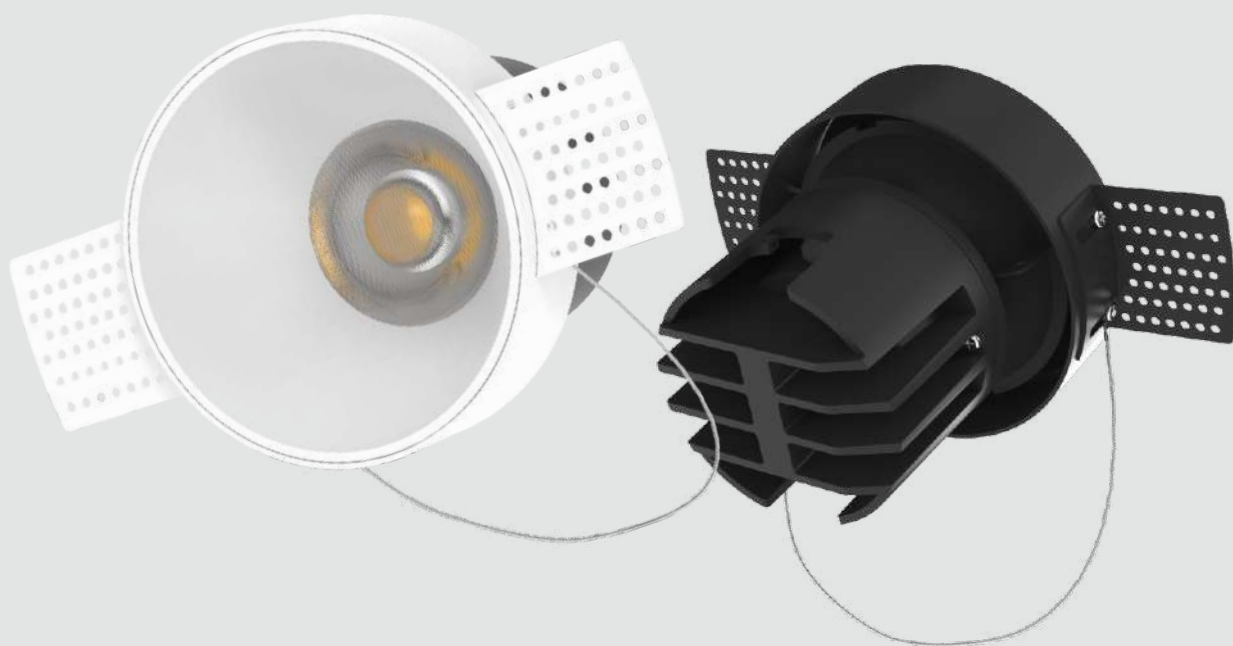

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	82X80mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

HARRIER

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	85X85mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5
Year
Warranty*

EYE

SPOTLIGHT

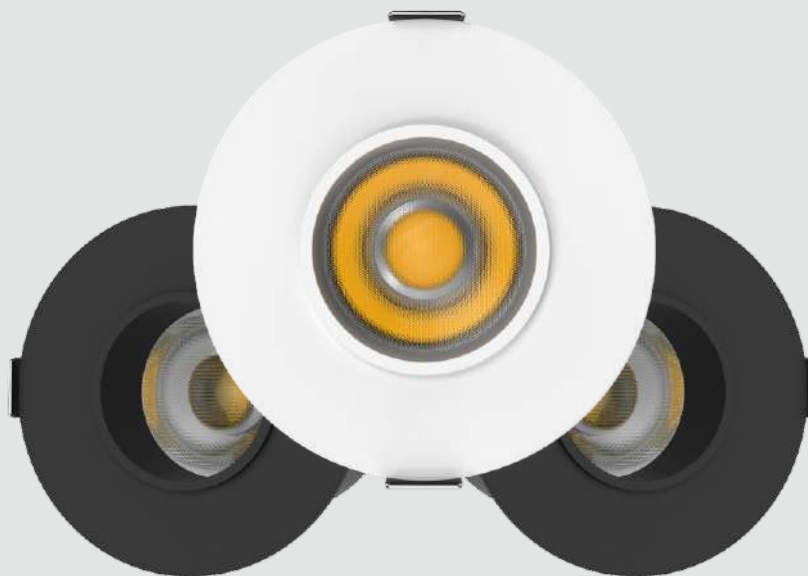

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w
Dimension	:	65X60mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

BOOST

MINIMAL SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5w	7-12w
Dimension	:	40X58mm	60X88mm
Cut Out	:	35mm	52mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5
Year
Warranty*

BRISK

MINIMAL SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	57X72mm	68X80mm
Cut Out	:	48mm	58mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge




440V
OVP



5
Year
Warranty*

STYLO

LOW DEPTH ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	85X50mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	38°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

IRIS

360° ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available

Watt	:	7-12w
Dimension	:	90X92mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*

GEO

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	130X45mm
Cut Out	:	130mm
Compatible	:	MR-16 Module
Material	:	Gypsum



FLY

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X44mm
Cut Out	:	120X120mm
Compatible	:	MR-16 Module
Material	:	Gypsum


BINGE

WALLWASHER FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X65mm
Cut Out	:	120X120mm
Compatible	:	MR-16 Module
Material	:	Gypsum



WH Body Color Available

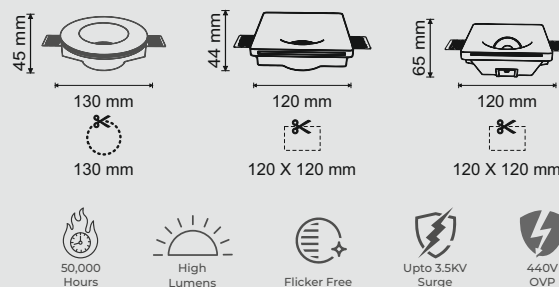

VISION

MR-16 MODULE



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	50X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*

GLOW

WALLWASHER



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	12w	20w
Dimension	:	85X70mm	108X86mm
Cut Out	:	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	

Note : 2700/3500/5000k (available on request)

Beam Angle	:	Asymmetric Wallwasher
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge





440V
OVP

5
Year
Warranty*

FLASH

WALLWASHER

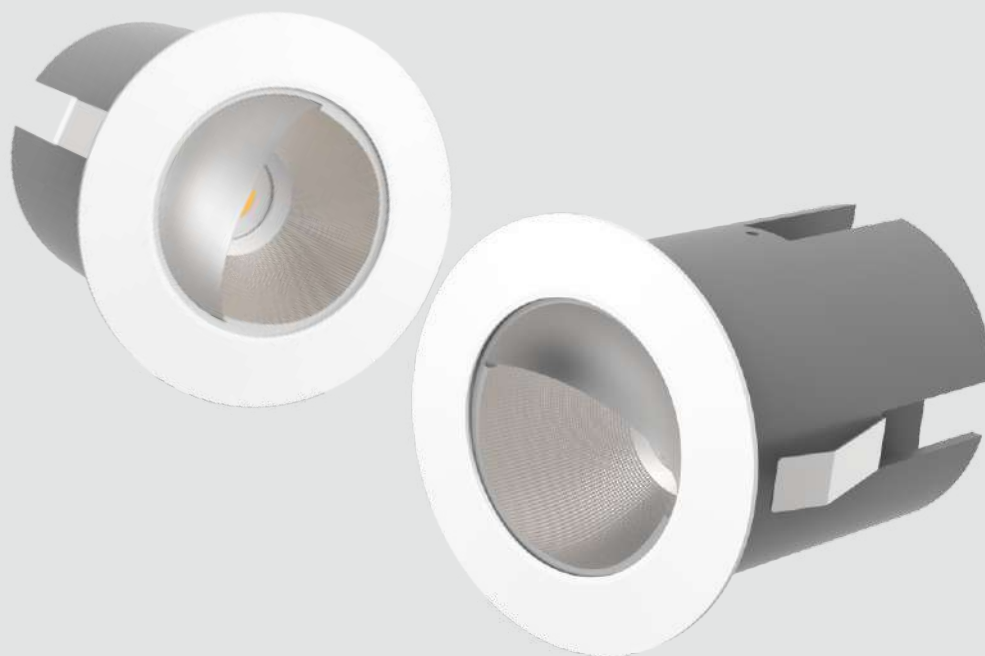

Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available

Watt	:	12w
Dimension	:	65X70mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	Asymmetric Wallwasher
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge





440V
OVP



5
Year
Warranty*

DESIRE

SURFACE SPOTLIGHT

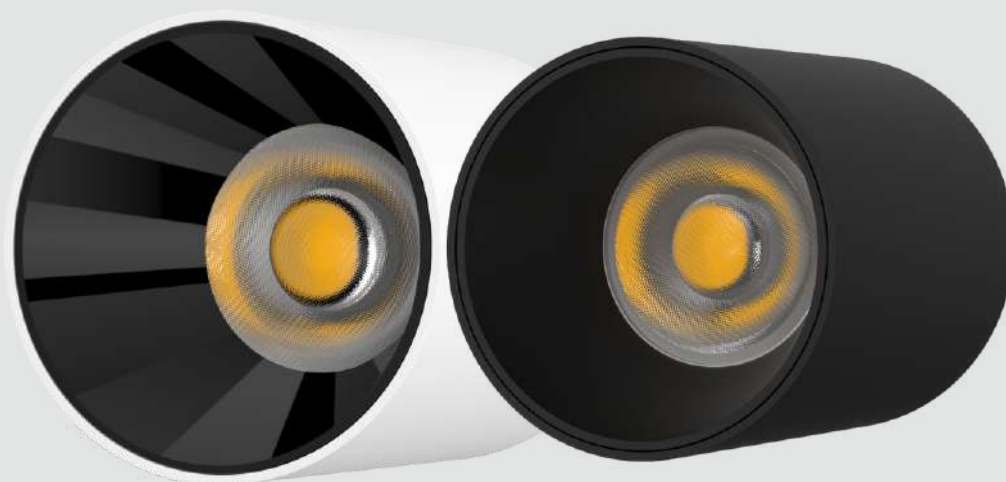

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w	20w
Dimension	:	55X75mm	65X85mm	70X95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5
Year
Warranty*

CORE

360° ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	12w
Dimension	:	55X70X95mm	55X70X95mm
Cut Out	:	52mm	-
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Litomatic/Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5

Year
Warranty*

POLO

SPOTLIGHT

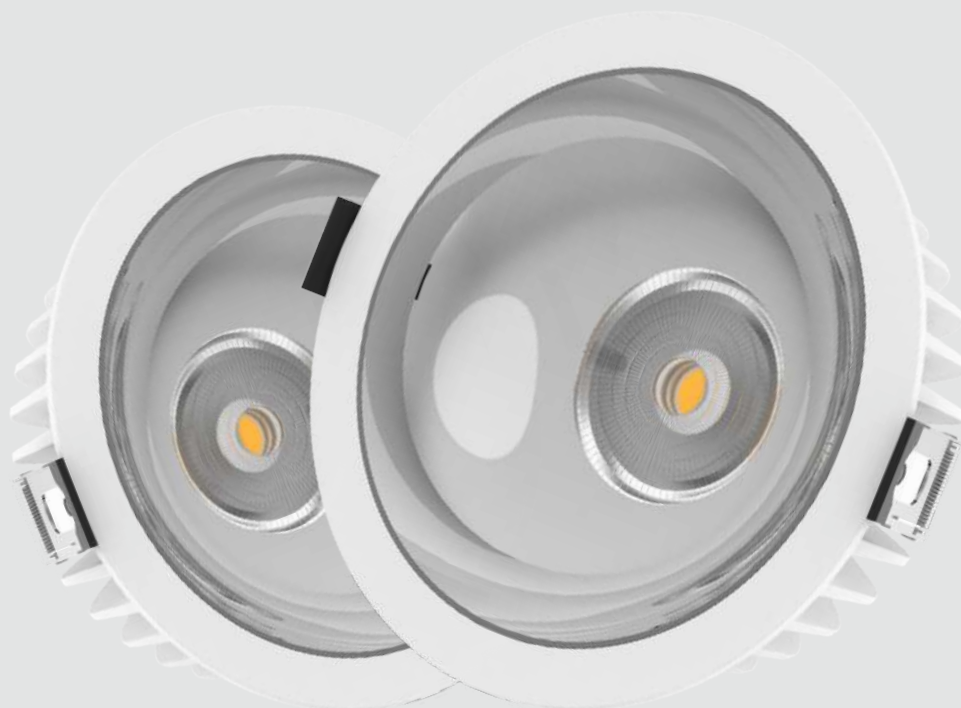

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT



Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w	20w	30w	36w
Dimension	:	85X32mm	115X42mm	145X50mm	170X60mm	230X70mm
Cut Out	:	75mm	100mm	130mm	155mm	200mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)				
		Note : 2700/3500/5000k (available on request)				
Beam Angle	:	45°				
CRI (Ra)	:	80 (90/95 available on request)				
Material	:	Die Cast Aluminium ADC-12				
LED Brand	:	Litomatic/Bridgelux				

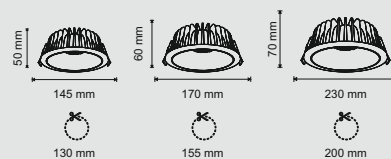

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP



5
Year
Warranty*

OPAL

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

Body Color Available

NEW
ARRIVAL

Watt	:	30w	36w	45w
Dimension	:	88X92mm	98X100mm	108X108mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	38°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Litomatic/Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5kV
Surge



440V
OVP

5

Year
Warranty*

CHARGE

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	20w	30w
Dimension	:	120X130X50mm	135X160X65mm	160X185X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Aluminium		
LED Brand	:	Litomatic/Bridgelux		

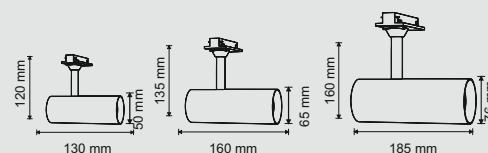

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5
Year
Warranty*

FORCE

TRACKLIGHT

Watt	:	12w	20-30w
Dimension	:	145X60X140mm	145X80X160mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Aluminium	
LED Brand	:	Litomatic/Bridgelux	



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

TRACK

2 Line/3 Line

TRACK CHANNEL

Dimension

1 Meter	:	1000X35X18mm
1.5 Meter	:	1500X35X18mm
2 Meter	:	2000X35X18mm





BK WH Body Color Available





LOOP

LASERBLADE



Watt	:	4w	6w	8w
Dimension	:	52X32X40mm	62X32X40mm	52X52X40mm
Cut Out	:	46X26mm	56X26mm	46X46mm



Watt	:	10w	15w	20w
Dimension	:	108X32X40mm	71X71X40mm	204X32X40mm
Cut Out	:	102X26mm	65X65mm	198X26mm

CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)



Note : 2700/3500/5000k (available on request)

Beam Angle : 25°

CRI (Ra) : 80 (90 available on request)

Material : Die Cast Aluminium ADC-12

LED Brand : Litomatic/Bridgelux

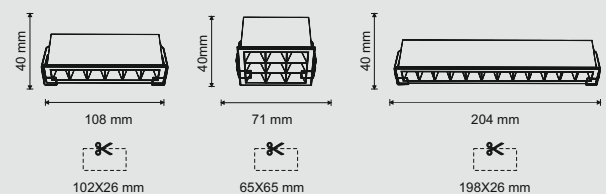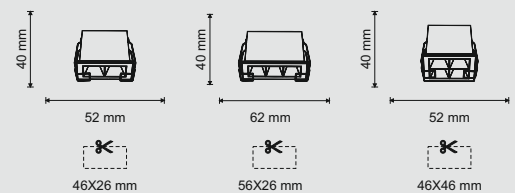

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

STREAK

LASERBLADE



Watt : 4w
Dimension : 52X52X56mm
Cut Out : 42X42mm


12w
128X52X56mm
120X42mm



Watt : 16w
Dimension : 90X90X56mm
Cut Out : 80X80mm

20w
205X52X56mm
195X42mm

CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)
Beam Angle : 38°
CRI (Ra) : 80 (90 available on request)
Material : Die Cast Aluminium ADC-12
LED Brand : Litomatic/Bridgelux

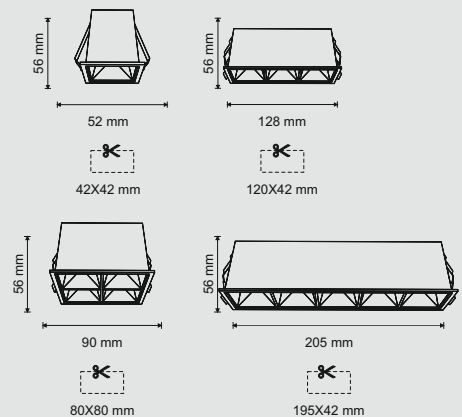

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available



COMPASS

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X44mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




BOAT

MINI SPOTLIGHT




Watt	:	3w
Dimension	:	40X30mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




PEARL

MINI SPOTLIGHT

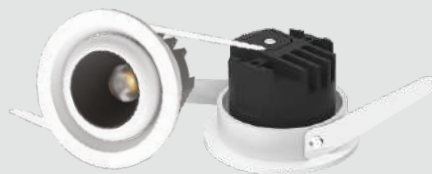

Watt	:	3w
Dimension	:	50X35mm
Cut Out	:	44mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

CRUISE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X35mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




DUKE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X30mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




BLAST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X26mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

ATOM

MINI SPOTLIGHT



Watt	:	5w
Dimension	:	50X45mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Beam Angle	:	40°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




SENSE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	46X60mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux




ZEST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X32mm
Cut Out	:	33mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	30°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

HAMMER

MINI SPOTLIGHT


Watt	:	3w
Dimension	:	36X45mm
Cut Out	:	30mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



STRIKE

MINI SPOTLIGHT

Watt	:	3w
Dimension	:	40X36mm
Cut Out	:	36mm
CCT (K)	:	3000k/4000k
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK

WH

Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP





5
Year
Warranty*

BRIO



FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	120°

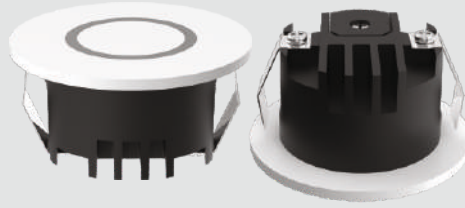

EDGE

FOOTLIGHT


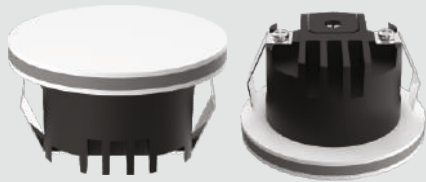


Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	180°

GUSTO



FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

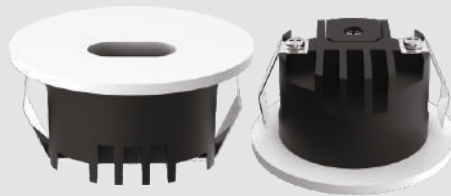


DASH

FOOTLIGHT

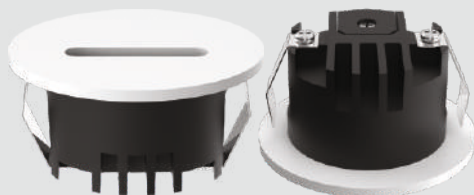

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

CCT(K)	:	3000k/4000k
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Litomatic/Bridgelux



BK WH Body Color Available

BEAT

STRIP LIGHT



Voltage	:	12V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (10mm)	24w/mtr. (10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		
Voltage	:	24V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/Mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (8mm)	24w/mtr.(10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		
CCT (K)	:	2700k/3000k/3500k/4000k/5000k/6500k			
Beam Angle	:	120°			
CRI (Ra)	:	80			
LED Brand	:	Litomatic/Bridgelux			
IP Rating	:	IP20			



Work with
SMPS

2
Year
Warranty*

BEAT

STRIP LIGHT (CCT)



Voltage	:	12V	
Watt (Size)	:	9w/mtr. (8mm)	12w/mtr. (10mm)
LED/Mtr.	:	2835 (180LED/mtr.)	2835 (240LED/mtr.)

Voltage	:	24V	
Watt (Size)	:	9.6w/mtr. (8mm)	12w/mtr. (10mm)
LED/Mtr.	:	2835 (192LED/mtr.)	2835 (240LED/mtr.)

CCT (K)	:	2700-6500k(Tunable)
Beam Angle	:	120°
CRI (Ra)	:	80
LED Brand	:	Litomatic/Bridgelux
IP Rating	:	IP20

WALLGRAZER

CURTAIN STRIPLIGHT

Voltage : 24V
Watt : 16w
LED : 48LED
CCT(K) : 3000k/4000k

Watt : 2X14.4w
LED : 56LED
CCT(K) : 3000k/4000k/2700-6500k(Tunable)
Beam Angle : 24°
Size : 12mm
IP : Ip20



WIDE BEAM STRIP

DIFFUSED STRETCH CEILING LIGHT

Voltage : 24V
Watt : 24w
LED : 24LED
CCT(K) : 2700-6500k(Tunable)
Beam Angle : 165°
Size : 15mm
IP : Ip20



Work with
SMPS


2

Year
Warranty*


SKY LINE



Belt Width : 10mtr./Roll
Application Width : <10mm
IP : Ip20

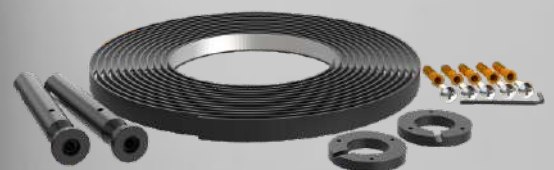

SILICON FLEX

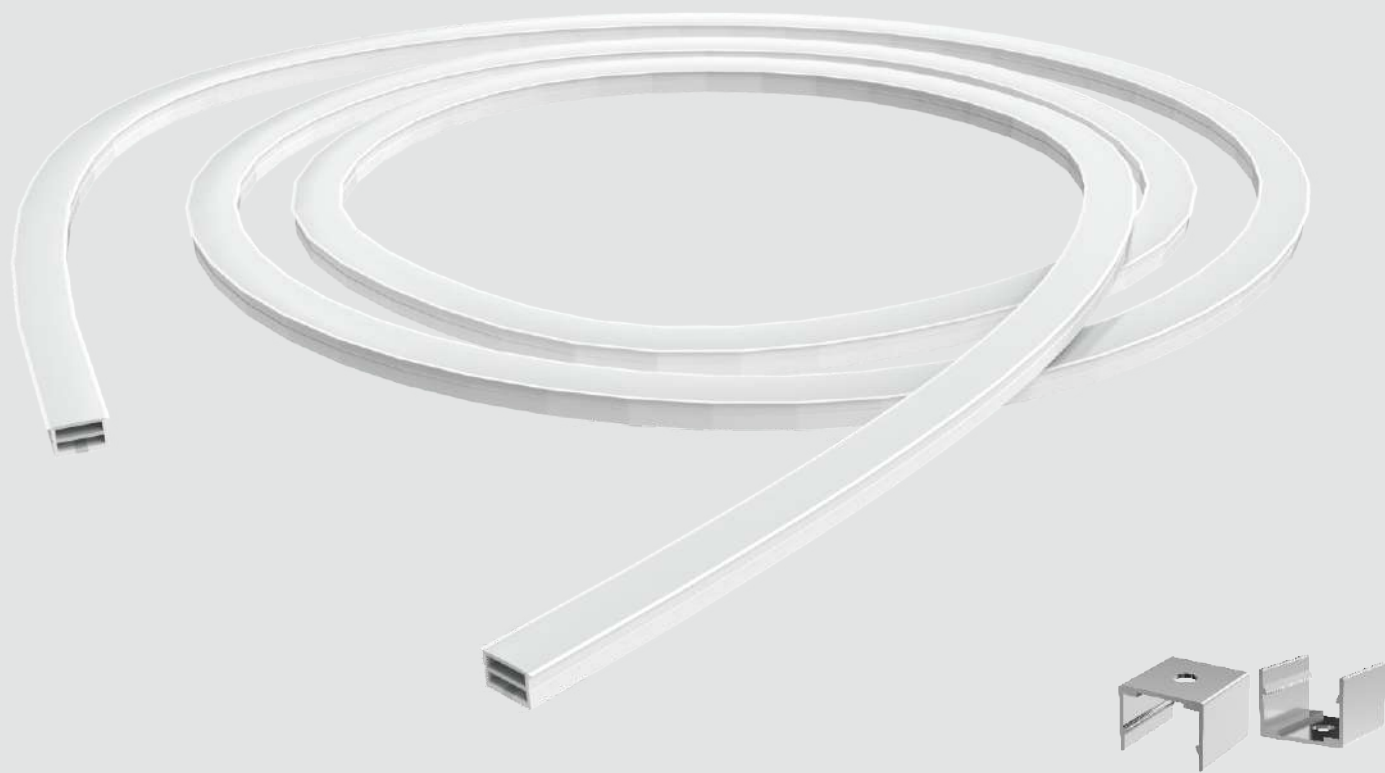

Type	:	Inbuilt Strip Silicon Flex				
Item	:	1010	1212	1510	408	1616
Watt	:	7.5w				
Voltage	:	24V				
CCT(K)	:	3000k				
Type	:	Blank Silicon Flex				
Item	:	2014	808	1616	1510	1510 (Black)
Silicon Flex Clips	:	1010	1212	1510	1616	408

SLIM SMPS




BEAT

PENCIL SMPS

Voltage : 12V
Watt/Amp : 24w/2Amp
Dimension : 121X18X18mm




Voltage : 24V
Watt/Amp : 24w/1Amp
Dimension : 121X18X18mm




NEW
ARRIVAL

BEAT

SLIM SMPS

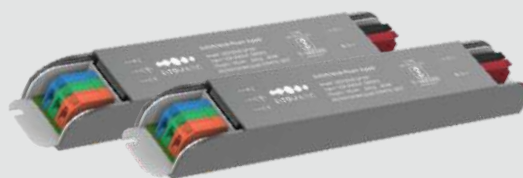


Voltage	:	12V		
Watt/Amp	:	36w/3Amp	60w/5Amp	100w/8.3Amp
Dimension	:	63X32X23mm	190X32X23mm	230X32X23mm
Watt/Amp	:	150w/12.5Amp	200w/16.6Amp	300w/25Amp
Dimension	:	250X32X23mm	285X32X23mm	235X48X28mm
Voltage	:	24V		
Watt/Amp	:	36w/1.5Amp	60w/2.5Amp	100w/4.2Amp
Dimension	:	63X32X23mm	190X32X23mm	230X32X23mm
Watt/Amp	:	150w/6.25Amp	200w/8.4Amp	300w/12.5Amp
Dimension	:	250X32X23mm	285X32X23mm	235X48X28mm

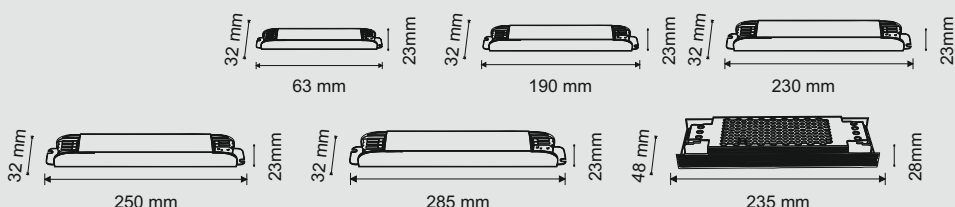

DAY LIGHT SENSOR

MOTION SENSOR



HUMAN BEING SENSOR

MOTION SENSOR




ILLUMINATION SENSOR

SENSOR



BUTTON REMOTE

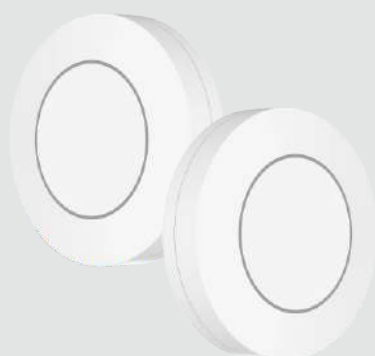

REMOTE

REMOTE CONTROLLER



Note : Wired version also Available

SCENE SWITCH

SCENE CONTROLLER

TOUCH PANEL

SCREEN



NEW
ARRIVAL



GATEWAY BLE

OUR CLIENTS





WHERE LIGHT
BECOMES THE
MASTERPIECE



SIMPLIFIED INTELLIGENT LIGHTING

Head Office

Plot No. : E-1 228, RIICO Industrial Area,
Opp. Urban Square Mall, Sukher,
Udaipur - 313001 (Raj.)

E : info@litomatic.com

w : www.litomatic.com